Get The sound

Acoustics
solutions for a
superior sound

studiobricks

Eco Line

Absorbers, Bass traps
and medium freqüency
absorbers made of
recycled PET.
The Eco solution for best
absorbption, reducing
reverb time thanks to its
25 kg / m^3 density.

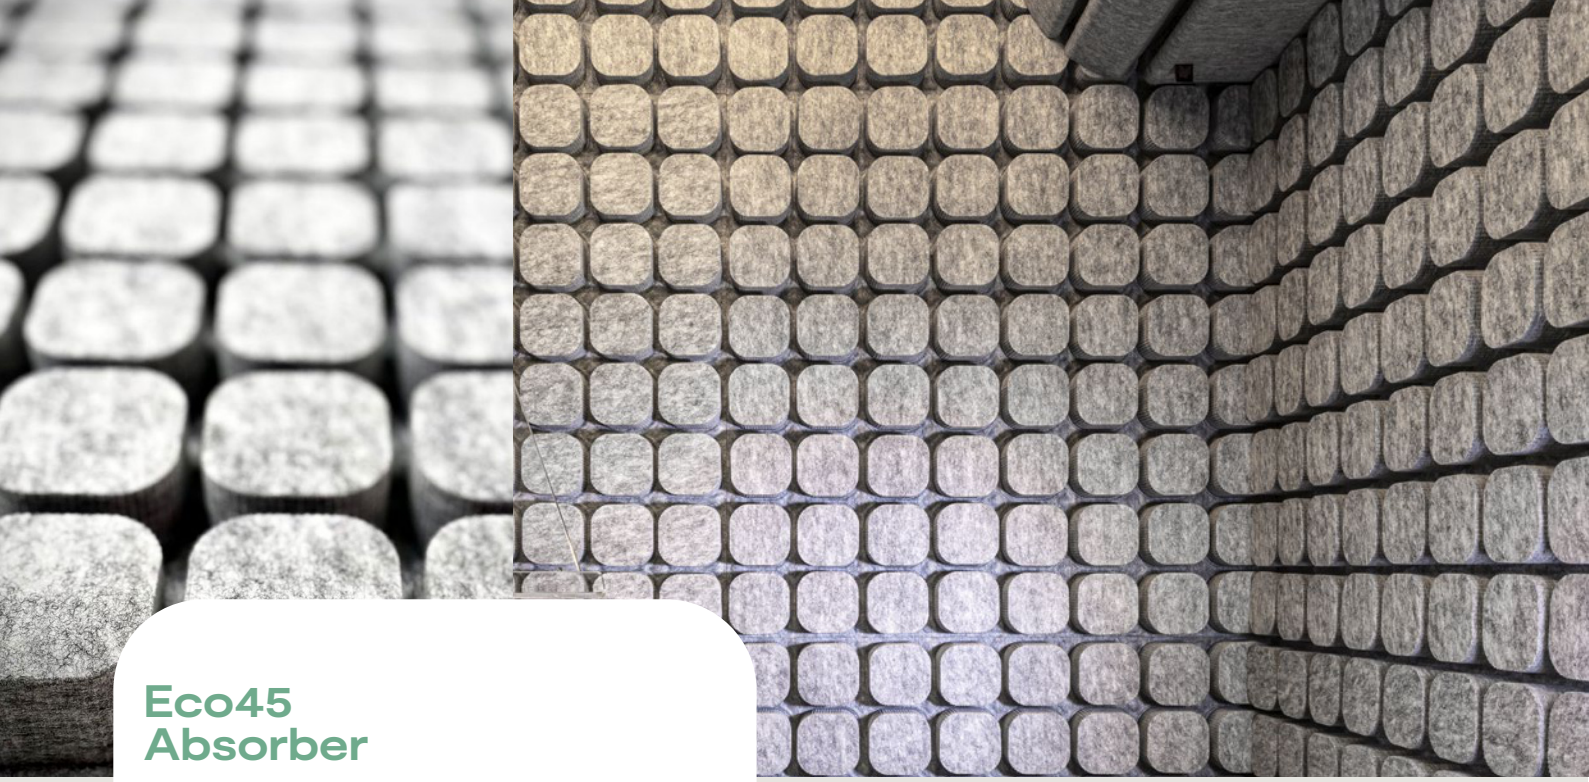

Eco45 Absorber

Recycled PET absorbers. The Eco solution for medium frequencies. Best absorbption ever reducing reverb time thanks to its 45 mm thickness and its 25 kg / m³ density.

Eco45

Ref. E45-01

Ref. E45F-01 (with fasteners)

60 x 60 x 4,5 cm
(23.6 x 23.6 x 1.77 in)

Eco45 Black

Ref. E45-02

Ref. E45F-02 (with fasteners)

60 x 60 x 4,5 cm
(23.6 x 23.6 x 1.77 in)

Technical specifications	
Dimensions (cm/in)	60x60 cm / 23.6x23.6 in
Thickness (cm/in)	4,5 cm / 1.77 in
Weight (kg/lb)	0,950 kg / 2,094 lb
Density	25 kg/m³
Composition	Recycled P.E.T. (thermally bonded, without chemical binders)
Color	Light gray or black
Reaction to fire Class	B – s1, d0 (DIN EN 13501-1: 2010)
Absorption Class	C (0,60 to 0,75 α_w) (UNE-EN ISO 11654:1998)
UNE-EN ISO 354:2004 certification	See
DIN EN 13501-1: 2010 certification	Yes
Delivery	
Units	10
Box dimensions (cm/in)	61,4x61,4x51,4 cm / 24.2x24.2x20,2 in
Box weight (kg/lb)	11,3 kg / 4.5 lb

Measurements

Weighted sound absorption coefficient (α_w)
(UNE-EN ISO 354:2004:)

α_w = 0,60 (H)

Sound absorption coefficient (α_s)
(UNE-EN ISO 11654:1998:)

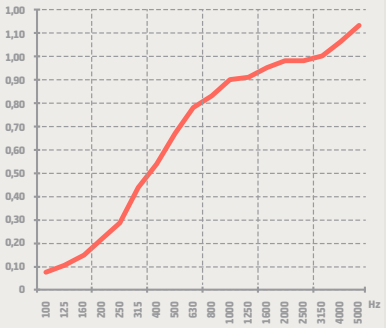

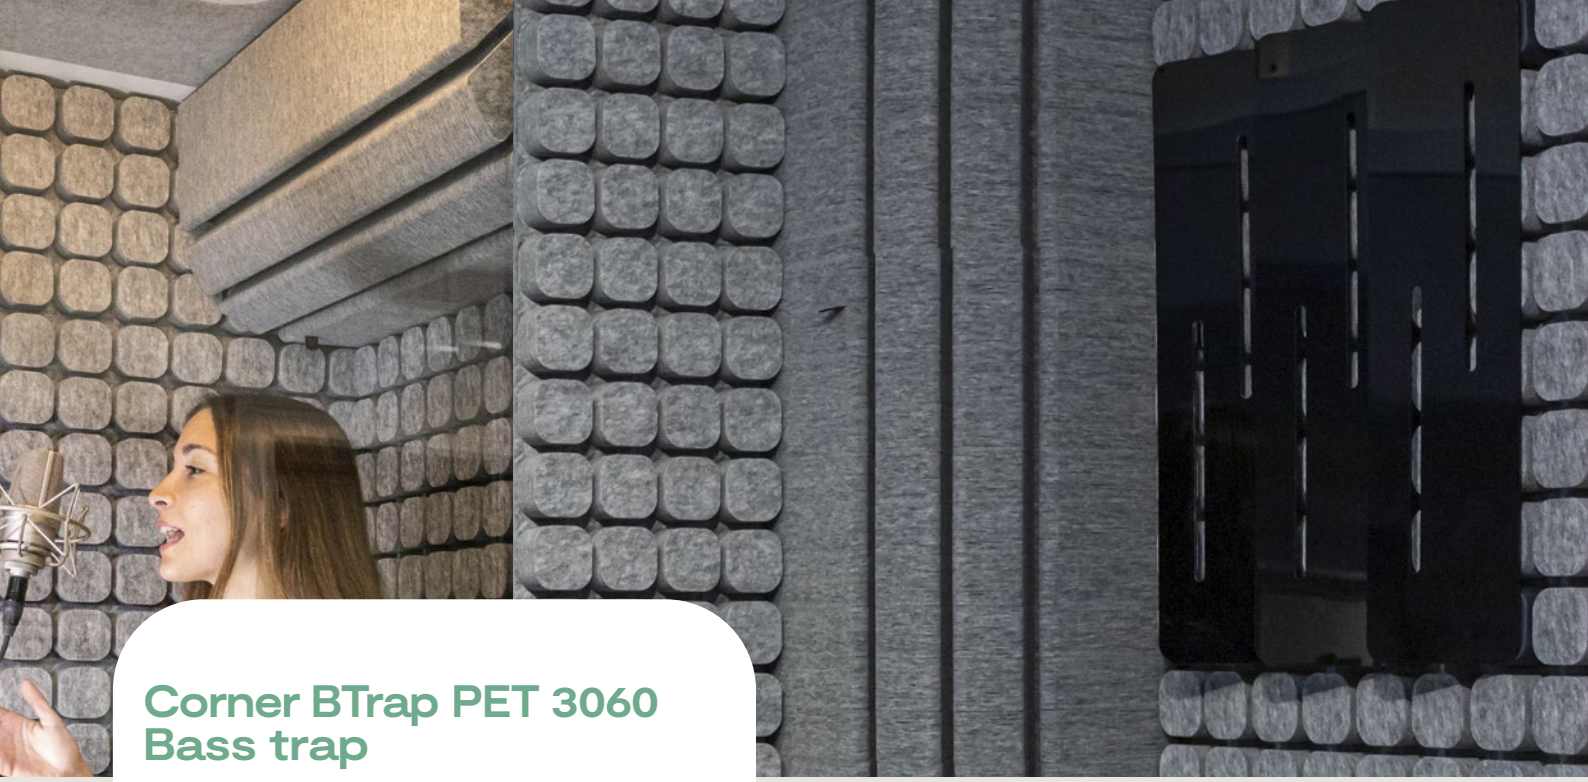

Corner BTrap PET 3060 Bass trap

Designed especially for corners, considerably reducing standing waves, making it ideal for recordings. Greater power to absorb very low frequencies even below 125Hz.



CBTrap PET 3060

Ref. ECBT3060-01

30 x 30 x 60 cm
(11.8 x 11.8 x 23.6 in)

CBTrap PET 3060 Black

Ref. ECBT3060-02

30 x 30 x 60 cm
(11.8 x 11.8 x 23.6 in)

Technical specifications	
Dimensions (cm/in)	30x30x60 cm / 11.8x11.8x23.6 in
Weight (kg/lb)	3 kg / 6.6 lb
Density	25 kg/m³
Composition	Recycled P.E.T. (thermally bonded, without chemical binders)
Color	Light Gray
Reaction to fire Class	B – s1, d0 (DIN EN 13501-1: 2010)
UNE-EN ISO 354:2004 certification	See
DIN EN 13501-1: 2010 certification	Yes
Delivery	
Units per box	4 units
Box size (cm/in)	61,3x61,3x62,3 cm / 24.1x24.1x24.5 in
Box weight (kg/lb)	13,9 kg / 30.6 lb

Measurements

Equivalent sound absorption area per object (A_{obj}) (UNE-EN ISO 354:2004)

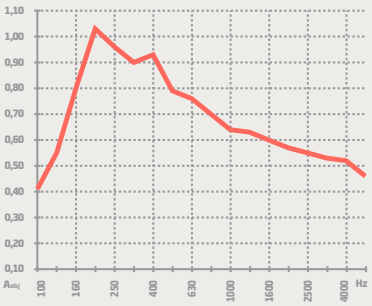

Corner BTrap PET 4560 Bass trap

Our beast for large rooms. Specially for corners, considerably reducing standing waves, making it ideal for recordings. Greater power to absorb very low frequencies even below 80Hz.

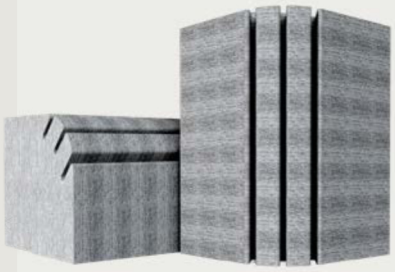

CBTrap PET 4560

Ref. ECBT4560-01

45 x 45 x 60 cm
(17.7 x 17.7 x 23.6 in)

CBTrap PET 4560 Black

Ref. ECBT4560-02

45 x 45 x 60 cm
(17.7 x 17.7 x 23.6 in)

Technical specifications	
Dimensions (cm/in)	45x45x60 cm / 17.7x17.7x23.6 in
Weight (kg/lb)	5,8 kg / 12.8 lb
Density	25 kg/m³
Composition	Recycled P.E.T. (thermally bonded, without chemical binders)
Color	Light Gray
Reaction to fire Class	B – s1, d0 (DIN EN 13501-1: 2010)
UNE-EN ISO 354:2004 certification	See
DIN EN 13501-1: 2010 certification	Yes
Delivery	
Units per box	2 units
Box dimensions (cm/in)	91,9x46,9x62,9 cm / 36.2x18.5x24.8 in
Box weight (kg/lb)	13,5 kg / 29.8 lb

Measurements

Equivalent sound absorption area per object (A_{obj})
(UNE-EN ISO 354:2004)

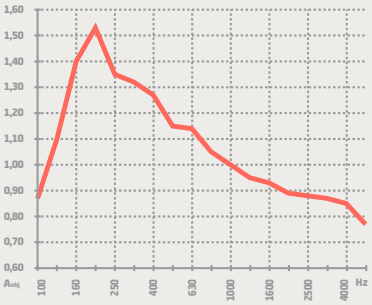

BTrap PET 3060 Bass trap

The big brother of the BroadBandPET1560. Absorb a wide range of frequencies with a boost at 160 Hz). Very effective in avoiding SBIR problems.

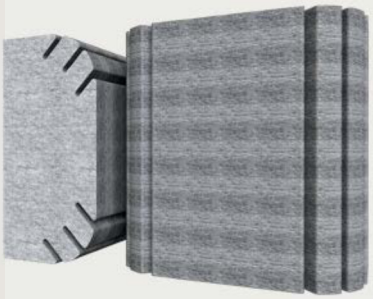

BTrap PET 3060

Ref. EBT3060-01

60 x 30 x 60 cm
(23.6 x 11.8 x 23.6 in)

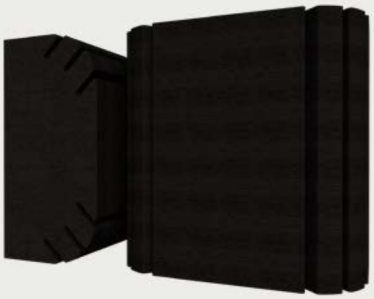

BTrap PET 3060 Black

Ref. EBT3060-02

60 x 30 x 60 cm
(23.6 x 11.8 x 23.6 in)

Technical specifications	
Dimensions (cm/in)	60x30x60 cm / 23.6x11.8x23.6 in
Weight (kg/lb)	4,9 kg / 10.8 lb
Density	25 kg/m³
Composition	Recycled P.E.T. (thermally bonded, without chemical binders)
Color	Light Gray
Reaction to fire Class	B – s1, d0 (DIN EN 13501-1: 2010)
UNE-EN ISO 354:2004 certification	See
DIN EN 13501-1: 2010 certification	Yes
Delivery	
Units per box	2 units
Box size (cm/in)	61,9x61,9x62,9 cm / 24.4x24.4x24.8 in
Box weight	11,7 kg / 25.8 lb

Measurements

Equivalent sound absorption area per object (A_{obj})
(UNE-EN ISO 354:2004)

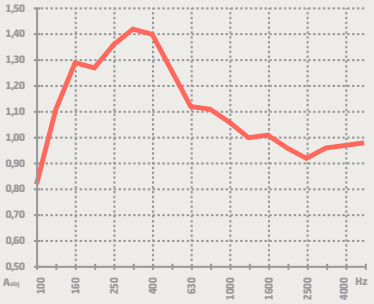

Broadband PET 1560 absorber

Designed to absorb a wide range of frequencies. A versatile and highly effective solution for early reflections.



BBand PET 1560

Ref. EBB1560-01

60 x 15 x 60 cm
(23.6 x 5.9 x 23.6 in)

BBand PET 1560 Black

Ref. EBB1560-02

60 x 15 x 60 cm
(23.6 x 5.9 x 23.6 in)

Technical specifications	
Dimensions (cm/in)	60x15x60 cm / 23.6x5.9x23.6 in
Weight (kg/lb)	2,3 kg / 5 lb
Density	25 kg/m³
Composition	Recycled P.E.T. (thermally bonded, without chemical binders)
Color	Light Gray or Black
Reaction to fire Class	B – s1, d0 (DIN EN 13501-1: 2010)
UNE-EN ISO 354:2004 certification	See
DIN EN 13501-1: 2010 certification	Yes
Delivery	
Units per box	4 units
Box size (cm/in)	61,9x61,9x62,9 cm / 24.4x24.4x24.8 in
Box weight	11,1 kg / 24.5 lb

Measurements

Equivalent sound absorption area per object (A_{obj})
(UNE-EN ISO 354:2004)

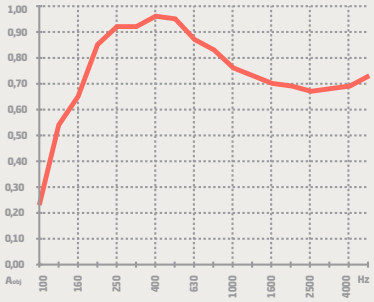

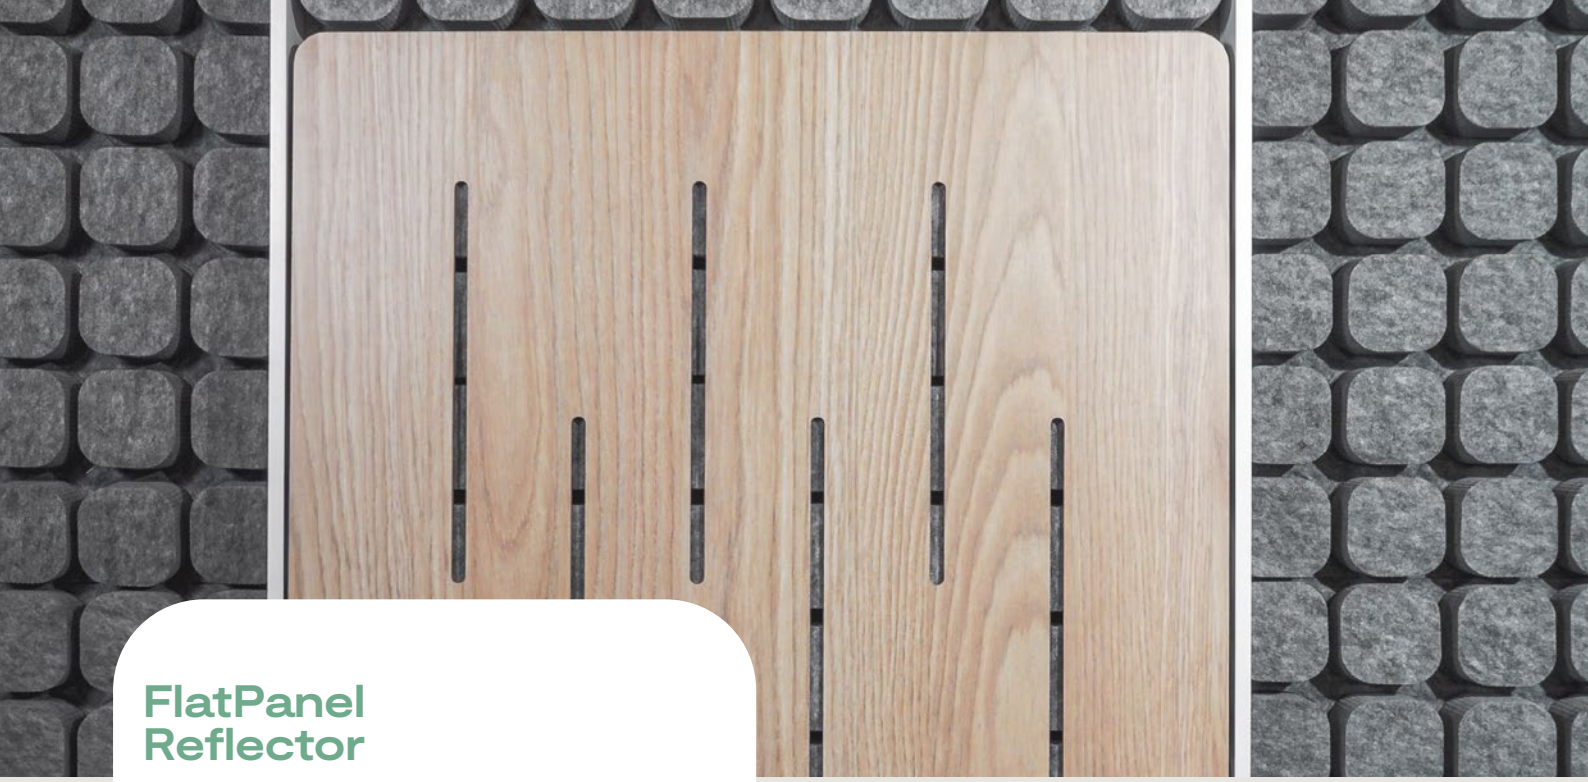

FlatPanel Reflector

New Studiobricks FlatPanel for refflection. Place them separately or together, in line or at different heights to get the exact amount of absorption and diffussion you want.

FlatPanel Nordic

Ref. FPA-04

59 x 59 cm
(23.2 x 23.2 in)

FlatPanel White

Ref. FPA-03

59 x 59 cm
(23.2 x 23.2 in)

FlatPanel Black

Ref. FPA-02

59 x 59 cm
(23.2 x 23.2 in)

Technical specifications	
Dimensions (cm/in)	59x59 cm / 23.2x23.2 in
Panel thickness (cm/in)	White-black: 3 mm / 0.12 in Nordic: 4 mm / 0.16 in
Weight (kg/lb)	White-black: 1,2 kg / 2.6 lb Nordic: 1.3 kg / 2.9 lb
Density	White-black: 1190 Nordic: 770 kg/m^3
Composition	White-black: 100% recycled and recyclable PMMA (Polymethyl methacrylate) Nordic: MDF
Color	White, black, Nordic
Fire rating	White-black: UK: BS 476 Part.7 class 3 EU: EN 13501-1-2009 E USA: UL 94 HB
Delivery	
Set	3 units + 12 fixations
Box dimensions (cm/in)	60,9 x 60,9 x 19,9 cm / 24.1x24.1x7.6 in
Box weight (kg/lb)	White-black: 5 kg / 11 lb Nordic: 5,3 kg / 11.7 lb

ISO 14001 ISO 9001:2015 CE

SmartPanel Modular Reflector

Modules for reflection and diffusion. Place them separately or together, in line or at diferent heights to get exactly what you need. Redirect possible echoes in your room.

SmartPanel Nordic

Ref. SPA-04

59 x 59 cm
(23.2 x 23.2 in)

SmartPanel White

Ref. SPA-03

59 x 59 cm
(23.2 x 23.2 in)

SmartPanel Black

Ref. SPA-02

59 x 59 cm
(23.2 x 23.2 in)

Technical specifications	
Dimensions (cm/in)	14x59 cm / 5,5x23,2 in
Panel thickness (cm/in)	White-black: 3 mm / 0,12 in Nordic: 4 mm / 0,16 in
Weight (kg/lb)	White-black: 0,28 kg / 0.62 lb Nordic: 0,33 kg / 0.73 lb
Density	White-black: 1190 Nordic: 770 kg/m^3
Composition	White-black: 100% recycled and recyclable PMMA (Polymethyl methacrylate) Nordic: MDF
Color	White, black, Nordic
Fire rating	White-black: UK: BS 476 Part.7 class 3 EU: EN 13501-1-2009 E USA: UL 94 HB
Delivery	
Set	4 units + 8 fixations
Box dimensions (cm/in)	60,9x16x11,4 cm / 24x6.3x4.5 in
Box weight (kg/lb)	1,5 kg / 3.3 lb

ISO 14001 ISO 9001:2015 CE

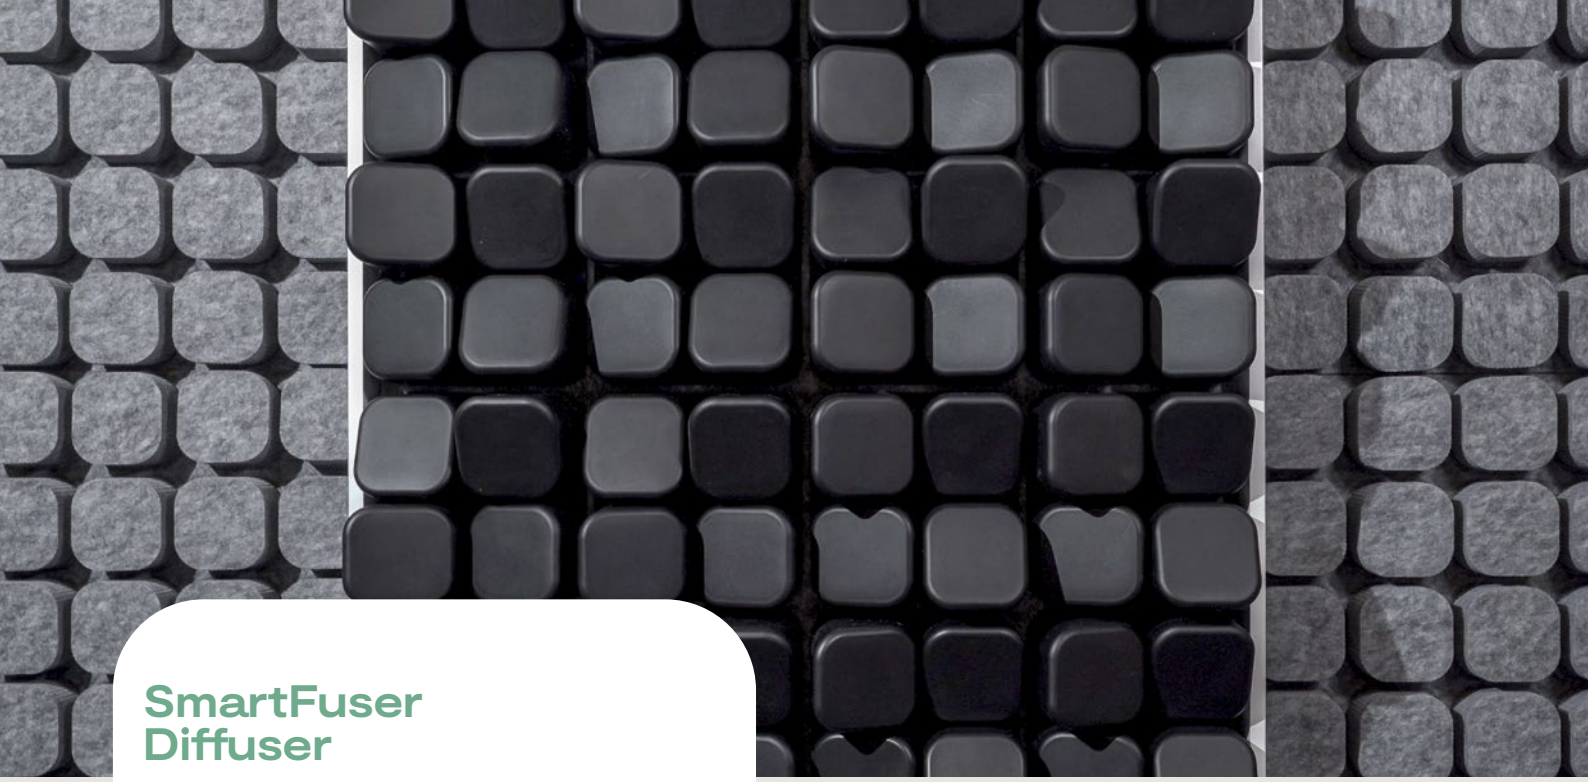

SmartFuser Diffuser

A modular diffuser that allows you to adjust the balance of mid and high frequencies in your room with great flexibility. Gain vividness and brightness with a touch of design.

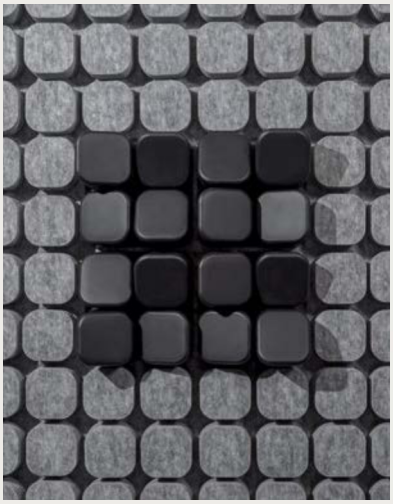

SmartFuser Black

Ref. SFU-02

15 x 15 x 10 cm
(5.9 x 5.9 x 3.9 in)

SmartFuser White

Ref. SFU-03

15 x 15 x 10 cm
(5.9 x 5.9 x 3.9 in)

Technical specifications	
Dimensions (cm/in)	14,5x14,5x10 cm / 5.7x5.7x3.9 in
Weight (kg/lb)	0,19 kg / 0.41 lb
Density	1190 kg/m^3
Composition	100% recycled and recyclable PMMA (Polymethyl methacrylate)
Color	White, black
Fire rating	UK: BS 476 Part.7 class 3 EU: EN 13501-1-2009 E USA: UL 94 HB
Delivery	
Set	8 units (2 boxes of 4 units)
Box dimensions (cm/in)	60,3 x 15,4 x 11,6 cm / 23.6x6.1x5.6 in
Box weight (kg/lb)	3,8 kg / 8.8 lb

ISO 14001 ISO 9001:2015 CE

Classic Line

Absorbers and Bass traps absorbers made of FR28 foam with a touch of colour thanks to recycled PET felt.
The classic solution for absorbption, reducing reverb time thanks to its 28 kg / m^3 density.
California Technical Bulletin 117-2013 approved.

Classic50 Absorber

Our classic absorber for affordable budgets. Greater power to absorb and reduce reverb time thanks to its 50 mm thickness and its 28 kg / m³ density

Classic50

Ref. CL50

60 x 60 x 5 cm
(23.6 x 23.6 x 1.96 in)

Technical specifications	
Dimensions (cm/in)	60x60 cm / 23.6x23.6 in
Thickness (cm/in)	5 cm / 1.96 in
Weight (kg/lb)	0,4 kg / 0.9 lb
Density	28 kg/m³
Composition	100% PUR, Flexible polyurethane foam (FR28E)
Color	Anthracite black
Flame retardants treatments	Yes
Absorption Class	C (0,60 to 0,75 α_w) (UNE-EN ISO 11654:1998)
UNE-EN ISO 354:2004 certification	See
TB17-2013 certification	See
Delivery	
Units	12
Box size (cm/in)	61,9x61,9x62,9 cm / 24.4x24.4x24.8 in
Box weight (kg/lb)	6,7 kg / 14.8 lb

Measurements

Weighted sound absorption coefficient (α_w)
(UNE-EN ISO 354:2004:)

α_w = 0,65 (H)

Sound absorption coefficient (α_s)
(UNE-EN ISO 11654:1998:)

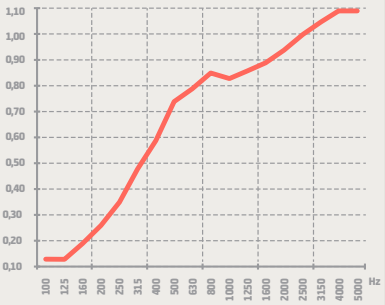

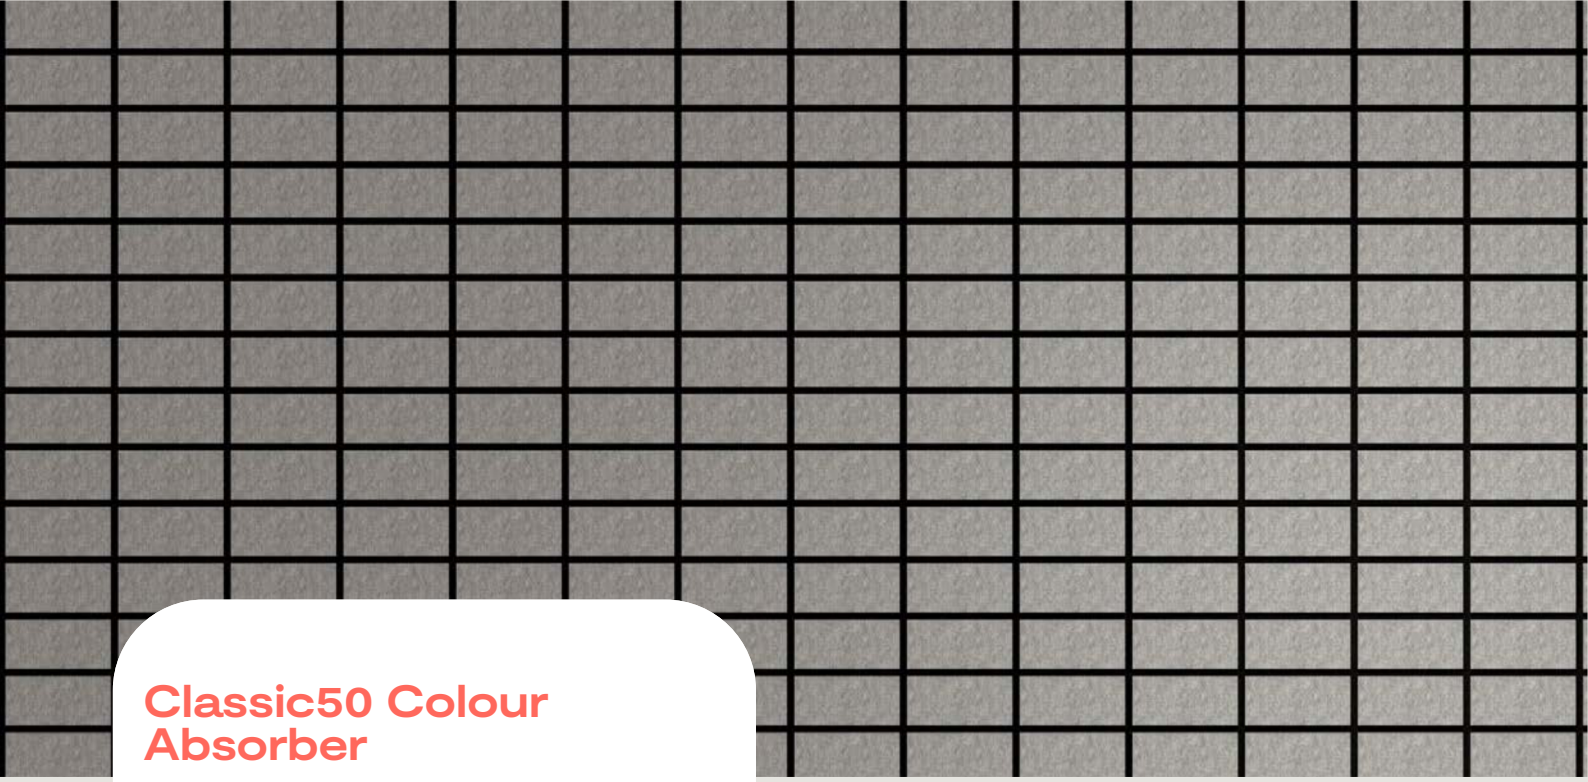

Classic50 Colour Absorber

A touch of colour for our classic absorber for aordable budgets. Greater power to absorb and reduce reverb time thanks to its 50 mm thickness and its 28 kg / m³ density

Classic50C Light gray

Ref. CL50C-01

60 x 60 x 5 cm
(23.6 x 23.6 x 1.96 in)

Classic50C Orange

Ref. CL50C-05

60 x 60 x 5 cm
(23.6 x 23.6 x 1.96 in)

Classic50C Warm gray

Ref. CL50C-06

60 x 60 x 5 cm
(23.6 x 23.6 x 1.96 in)

Technical specifications	
Dimensions (cm/in)	60x60 cm / 23.6x23.6 in
Thickness (cm/in)	5 cm / 1.96 in
Weight (kg/lb)	0,4 kg / 0.9 lb
Density	28 kg/m³
Composition	100% PUR, Flexible polyurethane foam (FR28E) + Polyester felt
Colors	Anthracite black + (Gray, Stone, Clay, Blue)
Flame retardants treatments	Yes
Absorption Class	C (0,60 to 0,75 α_w) (UNE-EN ISO 11654:1998)
UNE-EN ISO 354:2004 certification	See
TB17-2013 certification	See
Delivery	
Units	12
Box size (cm/in)	61,9x61,9x62,9 cm / 24.4x24.4x24.8 in
Box weight (kg/lb)	6,7 kg / 14.8 lb

Measurements

Weighted sound absorption coefficient (α_w)
(UNE-EN ISO 354:2004:)

α_w = 0,65 (H)

Sound absorption coefficient (α_s)
(UNE-EN ISO 11654:1998:)

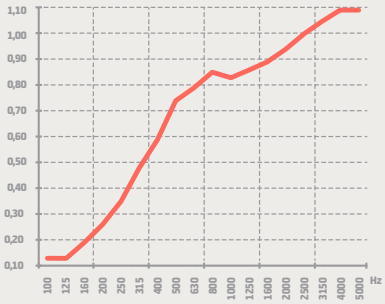

Corner BTrap Classic 3060 Bass trap

Designed especially for corners, considerably reducing standing waves, making it ideal for recordings. Greater power to absorb very low frequencies even below 160Hz.

Corner BTrap Classic 3060

Ref. CLACBT3060

30 x 30 x 60 cm
(11.8 x 11.8 x 23.6 in)

Technical specifications	
Dimensions (cm/in)	30x30x60 cm / 11.8x11.8x23.6 in
Weight (kg/lb)	1,3 kg / 2 lb
Density	28 kg/m^3
Composition	100% PUR, Flexible polyurethane foam (FR28E)
Color	Anthracite black
Flame retardants treatments	Yes
Absorption Class	C (0,60 to 0,75 α_w) (UNE-EN ISO 11654:1998)
UNE-EN ISO 354:2004 certification	See
TB17-2013 certification	See
Delivery	
Units per box	4 units
Box size (cm/in)	61,9x61,9x62,9 cm / 24.4x24.4x24.8 in
Box weight (kg/lb)	7,1 kg / 15.6 lb

Measurements

Equivalent sound absorption area per object (A_{obj}) (UNE-EN ISO 354:2004)

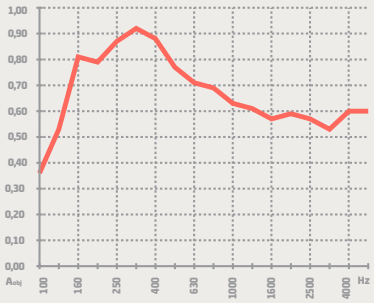

Partners and clients

Studiobricks solve noise and acoustic issues for many companies, public institutions and individuals around the world in 49 countries for over 10 years.

We have strongs relationship with our clients' design teams. Together with WeWork we designed and created an exclusive phone booth that is being installed in the US and all over Europe in WeWork buildings.

PELOTON

Johnson & Johnson

storytel

SAP

ERICSSON

Penguin Random House

COLUMBIA UNIVERSITY

Disney

NOKIA

NOVARTIS

wework

almirall

MUSIC DISTRICT™

Retail Price

Eco45 (10 units)	1,900 AED
Eco45 Black (10 units)	2,300 AED
Corner BTrap PET 3060 (4 units)	2,100 AED
Corner BTrap PET 3060 Black (4 units)	2,280 AED
Corner BTrap PET 4560 (2 units)	1,950 AED
Corner BTrap PET 4560 Black (2 units)	2,280 AED
BBand PET 1560 (4 units)	2,200 AED
BBand PET 1560 Black (4 units)	2,300 AED
BTrap PET 3060 (2 units)	1,950 AED
BTrap PET 3060 Black (2 units)	1,900 AED
FlatPanel Nordic (3 units)	1,100 AED
FlatPanel White (3 units)	1,100 AED
FlatPanel Black (3 units)	1,100 AED
SmartPanel Nordic (4 units)	610 AED
SmartPanel White (4 units)	630 AED
SmartPanel Black (4 units)	630 AED
SmartFuser White (8 units)	380 AED
SmartFuser Black (8 units)	380 AED
Classic50 (12 units)	1,550 AED
Classic50C Light Gray (12 units)	2,300 AED
Classic50C Orange (12 units)	2,300 AED
Classic50C Brown (12 units)	2,300 AED
Corner BTrap Classic 3060 (4 units)	840 AED